

Motor-driven Master Type (Motor N Fader, Motor K Fader, Motor V Fader)

Provides a superior operational feel with high-speed tracking in motor drive mode



Typical Specifications

Items	Specifications		
	Motor N fader	Motor K fader	Motor V fader
Total resistance tolerance	±20%		
Maximum operating voltage	10V DC, 200V AC (Travel: 60mm) 10V DC, 500V AC (Travel: 100mm)		
Operating force	0.8±0.5N	0.4±0.25N	—
Operating life	30,000 cycles	300,000 cycles	100,000 cycles
Rated voltage of motor	10V DC		8V DC
Maximum current of motor	800mA or less (at 10V DC)		625mA or less (at 5V DC)
Operating temperature range	-10°C to +60°C		

Product Line

Number of resistor elements	Travel (mm)	Type	Lever type	Length of lever (mm)	Total resistance (kΩ)	Resistance taper	Terminal style	Touch sense track	Minimum order unit (pcs.)		Products No.	Drawing No.
									Japan	Export		
Single-unit	60	Motor N Fader	9-T (T-bar)	8.2	10	1B	Lead	With	120	120	RS60N11M9A0E	1
							For PC board (for auto dipping)			240	RS60N11M9A0F	2
	Lead						80		80	RSA0N11M9A0K	3	
	For PC board (for auto dipping)								160	RSA0N11M9A0J	4	
	100	Motor K Fader (CP type)	—	10.95	—	—	Connector	Without	42	84	RSA0K11V901S	5
		Motor V Fader					80		80	RSA0V11M9001	6	

Note

Other varieties are also available. Refer to "Other Specifications" (P.414).

Packing Specifications

Bulk/Tray

Product No.	Terminal style	Packing specifications	Number of packages (pcs.)		Export package measurements (mm)
			1 case /Japan	1 case /export packing	
RS60N	Lead	Tray	120	120	366×280×154
	For PC board			240	375×285×393
RSA0N	Lead		80	80	366×280×154
	For PC board			160	375×285×393
RSA0K	Connector	Bulk	42	84	524×374×201
RSA0V		Tray	80	80	540×360×205

Refer to P.414 for other specifications.
 Refer to P.414 for details of lever types.
 Refer to P.415, 416 for ordering products not listed.
 Refer to P.417 for soldering conditions.

■ Dimensions

Unit:mm

No.	Style	
1		
2		<p>PC board mounting hole dimensions (Viewed from mounting side)</p> <p>L:Lug terminal</p>
3		

Rotary Potentiometers

Slide Potentiometers

General-use

Mixer

■ Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
4		<p>L:Lug terminal</p>
5		
6		

Rotary Potentiometers
 Side Potentiometers
 General-use
 Mixer


Motor-driven Master Type / Other Specifications

In addition to the products listed, we can accommodate the follow specifications.

Products Specifications

Type		Travel (mm)	Model	Operating force	Touch sense track	Terminal
Single-unit	Motor N fader	60	RS60N11M	0.8±0.5N	Available	For PC board (for auto dipping) Lead
			RSA0N11M			
	Motor K fader CP type	100	RSA0K11V	0.4±0.25N		Fader terminal: Connector Motor terminal: Lead
Dual-unit (Servo + Audio track)	Motor N fader	60	RS60N12M	0.8±0.5N		Lead
			RSA0N12M			
	Motor K fader CP type	100	RSA0K12V	0.5 ^{+0.4} _{-0.25} N		Fader terminal: Connector Motor terminal: Lead

Lever Types

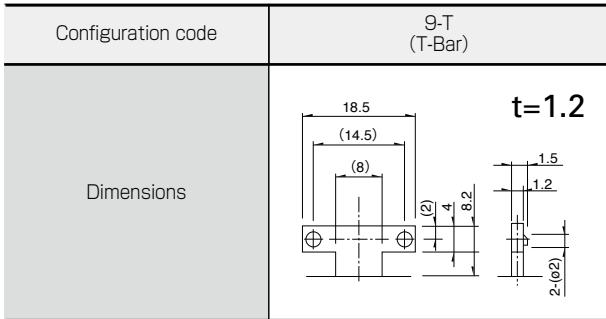

Total Resistance Variety


Total resistance (k Ω)	10※	50	100	250
------------------------	-----	----	-----	-----

※ Motor K fader, Motor V fader: Only 10kΩ

Resistance Taper

Resistance taper	Servo	1B		
	Audio	15A	1B	10A

Circuit Diagram

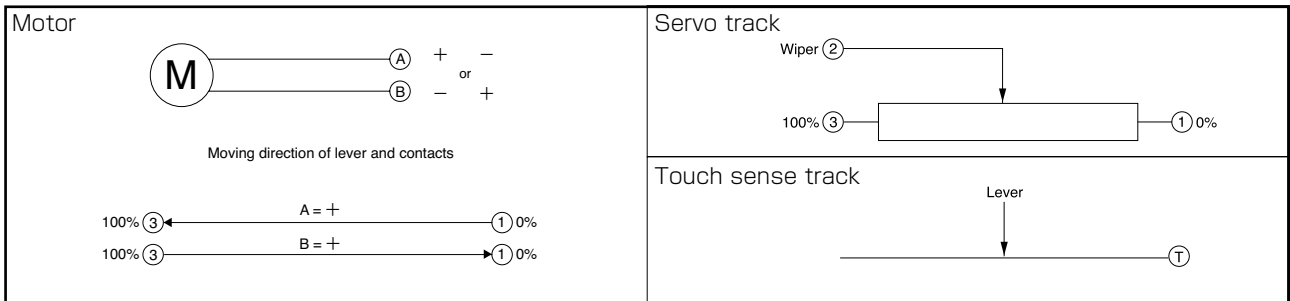

Note

Marked are specifications recommended by Alps Alpine.

Refer to P.415, 416 for ordering products not listed.

Motor-driven Master Type (Motor N Fader) / Ordering Products Not Listed

When ordering product varieties that are not listed, specify referring to the examples below.

Sample Part Number

R S 6 0 N 1 1 M - T 0 - B 1 0 3 - P

Travel (mm)

60	60
A0	100

Number of resistor elements

Single-unit	1
Dual-unit	2


Touch sense track

Code	Touch sense track
T0	Without
T1	With

Resistance taper

Code	Resistance taper
B	1B
A	15A
D	10A

For dual-units specify the taper of the audio track. Servo track will always be 1B taper.

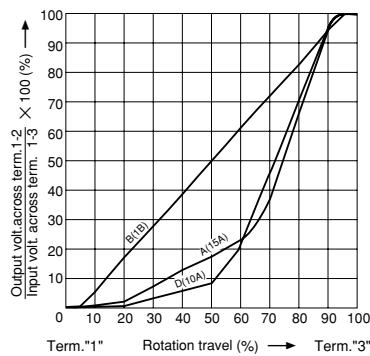

Total resistance

Code	Total resistance (k Ω)
103	10
503	50
104	100
254	250

Terminal configuration

Code	Terminal configuration
P	For PC board
L	Lead

Note

Marked are specifications recommended by Alps Alpine.

Rotary Potentiometers
 Side Potentiometers
 General-use
 Mixer

When ordering product varieties that are not listed, specify referring to the examples below.

Sample Part Number

R S A 0 K 1 1 V - T 0 - B 1 0 3

Number of resistor elements

Single-unit	1
Dual-unit	2

Type

CP type	V
---------	---


Touch sense track

Code	Touch sense track
T0	Without
T1	With

Resistance taper

Code	Resistance taper
B	1B
A	15A
D	10A

Appoint the taper of audio track in the case of dual-unit. Servo track is surely 1B taper.

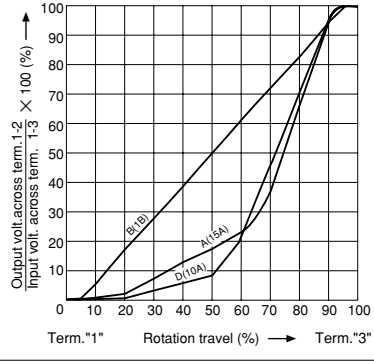











Total resistance

Code	Total resistance (k Ω)
103	10

Note

Marked are specifications recommended by Alps Alpine.

Rotary Potentiometers
 Slide Potentiometers
 General-use
 Mixer

Type		Low-profile Master Type		Motor-driven Master Type		
Series		Slim Type	Super P Fader	Motor N Fader	Motor K Fader	Motor V Fader
		RS □□ N11S	RS6011 □ P	RS □□ N1 □ M	RSA0K1 □ V	RSA0V11M
		Single-unit	Single-unit/Dual-unit	Single-unit/Dual-unit	Single-unit/Dual-unit	Single-unit
Photo						
Travel (mm)		60, 100	60	60, 100	100	
Direction of lever		Vertical				
Lever material		Metal				Resin
Operating temperature range		-10°C to +60°C				
Operating life		30,000 cycles			300,000 cycles	100,000 cycles
Available for automotive use		—	—	—	—	—
Life cycle						
Electrical performance	Total resistance (k Ω)	10, 50, 100, 250	10, 20, 50	10, 50, 100, 250	10	
	Resistance taper	15A, 1B, 10A		Single-unit: 1B Dual-unit: Servo 1B Audio 15A, 1B, 10A		1B
	Rated Power	0.2W (RS60N11S) 0.5W (RSA0N11S)	0.2W (Single-unit) 0.1W (Dual-unit)	0.2W (RS60N1□M) 0.5W (RSA0N1□M)	0.5W	
	Insulation resistance	100MΩ min. 250V DC				
	Voltage proof	250V AC for 1 minute				
	Center-taps	Without				
Mechanical performance	Operating force	0.3 ^{+0.5} _{-0.25} N	0.5 ^{+1.0} _{-0.4} N	0.8±0.5N	Single-unit: 0.4±0.25N Dual-unit: 0.25 to 0.9N	—
	Center detent	Without				
	Stopper strength	100N				10N
	Lever push-pull strength	50N				20N
	Lever wobble (mm) * Both sides	$\frac{2(2 \times L)}{25}$				
	Lever deviation (mm)	0.5 max. (One side)				
Terminal style		Insertion		Lead, Insertion	Connector (Fader) Lead (Motor)	Connector
Page		405	408	411		

Slide Potentiometers Soldering Conditions	417
Potentiometer Cautions	418
Potentiometers Measurement and Test Methods	420
Potentiometers Resistance Taper	422

Notes

- Attenuation is specified for residual resistance.
- "L" in the "Lever Wobble" column of the above table indicates the length of lever.

Reference for Manual Soldering


Series	Tip temperature	Duration of Soldering time	No. of solders
RS□□1, RS08U, RS□□K (Standard), RS□□N, RS□□N11S, RS6011□P, RS□□N1□M, RSA0K1□V (Motor terminal)	350°C max.	3s max.	1 time

Reference for Dip Soldering

Series	Preheating		Dip soldering		Number of soldering
	Soldering surface temperature	Heating time	Soldering temperature	Soldering time	
RS□□1, RS□□N, RS□□N11S, RS6011□P, RS□□N1□M	100°C max.	1 min. max.	260°C	5s max.	1 time

Example of Reflow Soldering Condition

Temperature profile

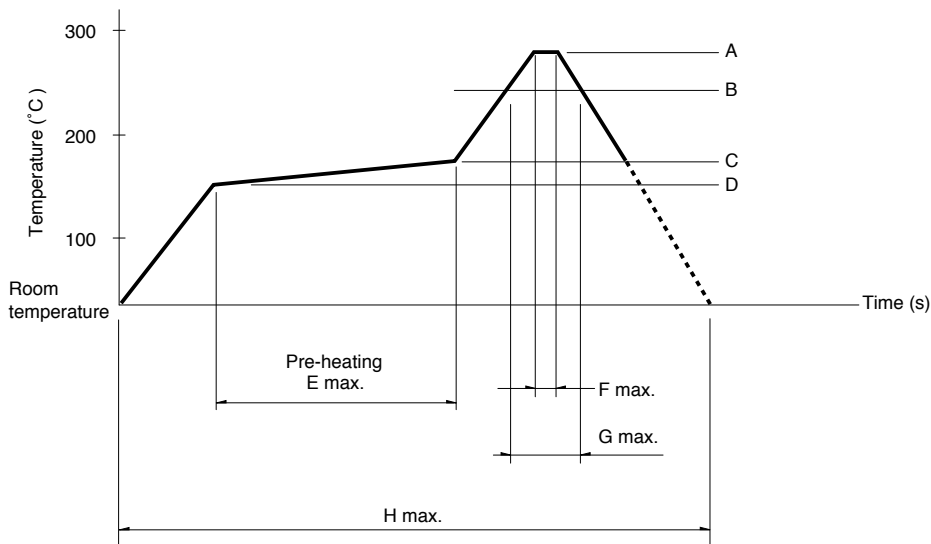

Series	A	B	C	D	E	F	G	H	No. of reflows
RS08U	250°C	200°C	150°C	150°C	2 min.	3s	40s	4 min.	1 time

Notes

1. When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
2. The temperatures given above are the maximum temperatures at the terminals of the products when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the products may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the products does not rise to 250°C or greater.
3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.